


WK-3, WK-4 SILVER/GOLD

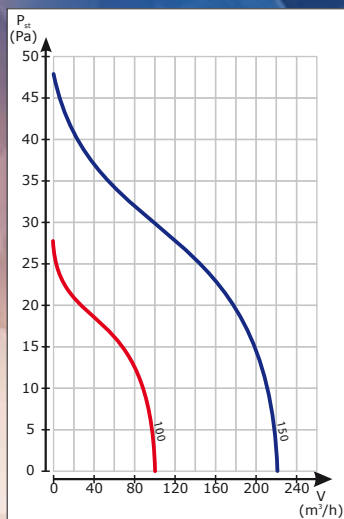

MODEL	P	W	F	T	H	A
WK-M3-1 SF	+	+	-	-	-	-
WK-B3-1 SF	-	-	-	-	-	-
WK-E2-B3 SF	-	-	-	+	-	-
WK-E1-B3 SF	-	-	+	+	-	-
WK-E3-B3 SF	-	-	-	+	+	-
WK-M4 SF	+	+	-	-	-	-
WK-B4 SF	-	-	-	-	-	-
WK-M3-1 GF	+	+	-	-	-	-
WK-B3-1 GF	-	-	-	-	-	-
WK-E2-B3 GF	-	-	-	+	-	-
WK-E1-B3 GF	-	-	+	+	-	-
WK-E3-B3 GF	-	-	-	+	+	-
WK-M4 GF	+	+	-	-	-	-
WK-B4 GF	-	-	-	-	-	-

P - pull cord switch, W - cable with a plug,
 F - photocell, T - time switch,
 H - adjustable humidity sensor, A - automatic louver

Type	Size [mm]				Weight [kg]	V	Hz	W	Reinforcement	Air flow [m³/h]	Class	Protection	Acoustical pressure	rev. [1/min]
	A	B	C	D										
WK-3	150	150	80	100	0,58	230	50	19	flux	100	II	IP-X4	39 dB (A)	2550
WK-4	180	180	85	150	0,70	230	50	22	flux	200	II	IP-X4	45 dB (A)	1850

